

# PREMIERTRAK 400/R400

The Powerscreen® Premiertrak 400 range of high performance primary jaw crushing plants are designed for medium scale operators in quarrying, demolition, recycling and mining applications. The range includes the Premiertrak R400 with hydraulic adjust and the Premiertrak 400 with hydraulic release. User benefits include track mobility for a quick set-up time (typically under 30 minutes,) hydraulic crusher setting adjustment for total control of product size and crusher overload protection to prevent damage by uncrushable objects.

### Features & Benefits

- High output and excellent reduction capability
- Heavy duty wear resistant hydraulic folding feed hopper with wedge fixing system
- Excellent under crusher access for removal of wire with hydraulic raise lower product conveyor
- Stepped self-cleaning grizzly feeder with under feeder screen option
- Deep fines chute to reduce material blockages
- Aggressive crushing action with high swing jaw encouraging material entry into crushing chamber
- Hydraulic crusher setting adjustment
- Improved manganese liner retention, protects jaw supports on both swing & fixed jaws
- Patented hydraulic crusher overload system, ideal for applications with un-crushable material in feed. 200mm<sup>3</sup>. Patent Publication Numbers: FR 1494810; DE 603 24 905.1-08; GB 2387342; US 7341213; CN ZL03810686.8 (Premiertrak R400)
- Economical to operate with low fuel consumption due to highly efficient direct drive system
- Angle adjustable product conveyor
- Easy access powerunit canopy
- PLC control system with auto start facility
- Remote control via umbilical
- Dust suppression system
- Easily set up

### Options

- Patented hydraulic deflector plate under crusher. Patent Publication Number: CN ZL03810686.8
- Side conveyor
- Single pole/twin pole magnet
- Radio remote control
- Belt weigher
- Electric refuelling pump
- Hydraulically driven water pump
- Wire mesh for underscreen
- Super tooth or multi tooth jaw plates
- Extended hopper

### Applications

- Sand & gravel
- Blasted rock
- River rock
- C & D waste
- Overburden
- Foundry waste
- Processed ores
- Processed minerals

### Output Potential

Up to 400 tph (441 US tph)\*

### Product Conveyor


Width: 1000mm (39")  
Discharge height: 3.9m (12' 9")

### Crusher

High capacity single toggle jaw  
Chamber size: 1100mm x 700mm (44"x28")  
Min CSS: 50mm (2")\*  
Max CSS: 150mm (6")\*

### Hopper

Wear Resistant Feed Hopper  
Length: 4.9m (16' 1")  
Width: 2.4m (7' 11")  
Capacity: 10m<sup>3</sup> (13yds<sup>3</sup>)

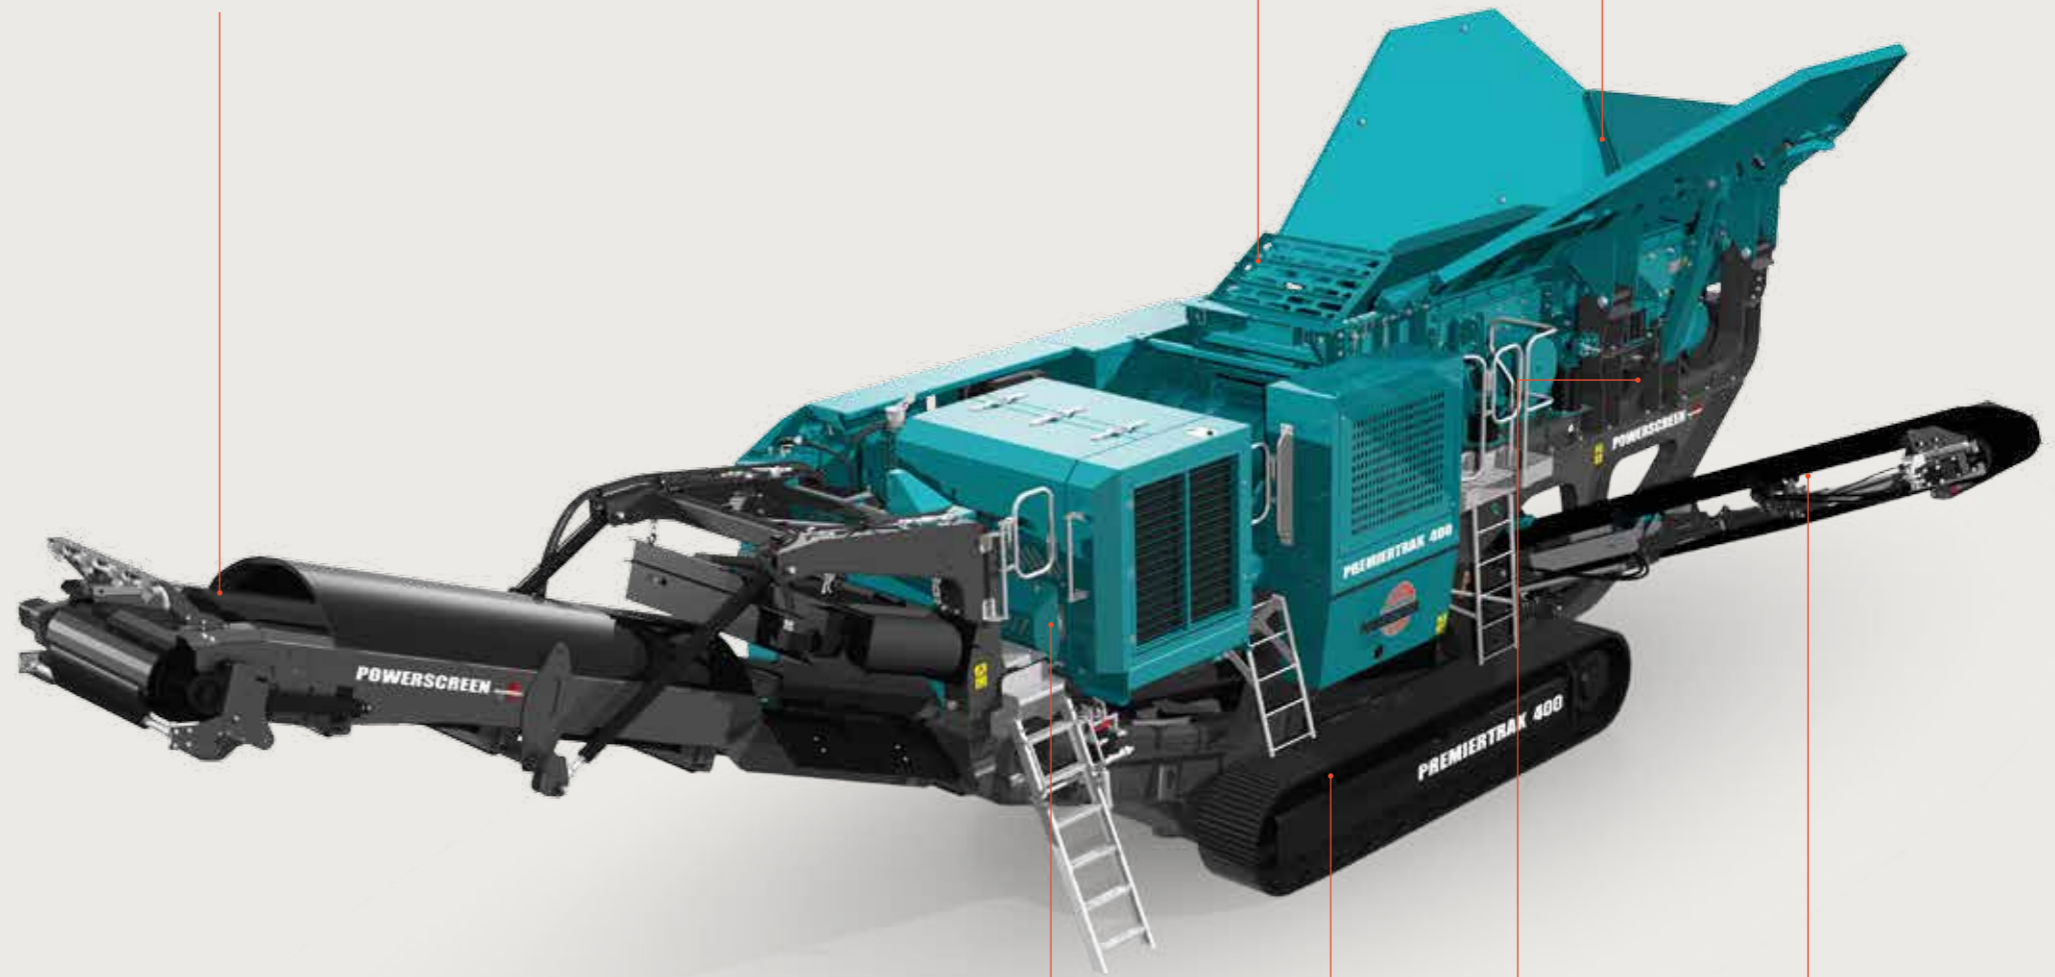

### Power Unit

Tier 3/Stage 3A:  
CAT C9 Acert 194kW (260hp)  
Fuel tank capacity: 410 L (108 US Gal)  
Tier 4i/Stage 3B:  
Scania DC9 80A 202kW (275hp)  
Fuel tank capacity: 450 L (119 US Gal)

### Tracks

500mm (19.7")

### Feeder

Vibrating pan and grizzly feeder  
Feeder length: 4.08m (13' 5")  
Feeder width: 1.06m (3' 6")  
Grizzly length: 2.12m (7')

### Side Conveyor (Option)

Width: 600mm (23.6")  
Discharge height: 2m (6'5")

### PREMIERTRAK 400/ R400

	400	R400
Weight (Est)	44,450kgs (97,995lbs)	44,750kgs (98,656lbs)
Transport width	2.8m (9'2")	2.8m (9'2")
Transport length	15.2m (49'10")	15.2m (49'10")
Transport height	3.4m (11'1")	3.4m (11'1")
Working width	2.8m (9'2")	2.8m (9'2")
(with side conveyor)	4.3m (14'1")	4.3m (14'1")
Working length	14.9m (49")	14.9m (49")
Working height	4.1m (13'6")	4.1m (13'6")



\*Depends on application  
Engines are available that are certified to US EPA and EU off road diesel emission standards. Talk to your dealer about possible certification options (i.e. Tier 3/Stage 3A, Tier 4i/Stage 3B, Tier 4F / Stage 4).

