



CRC380XHLS PORTABLE CONE/SCREEN PLANT




Features and Benefits

- ▶ High performance MVP380X cone crusher and LJ-TSV6203 screen
- ▶ Patent pending High Lift Screen (HLS) system allows large head of material to force feed cone crusher for maximum production
- ▶ Oversize cone hopper and overflow chute buffers feed variations, allows for peak production rates; no need to throttle back to prevent material backup to screen
- ▶ Swing forward screen support provides easy access for cone manganese change and quickly transforms to travel position
- ▶ Large 30" (762 mm) 7.5 hp (5.6 kW) reversible cross conveyors discharge 41" (1041 mm) beyond frame
- ▶ Unique blending gate system allows combining center deck with bottom deck AND bottom deck with center deck in 25% increments
- ▶ Numerous maintenance and safety features: swing forward screen; no-fastener hopper removal; overhead conveyor crane port; hydraulic lowered undercrusher conveyor; ratchet cone drive adjustment; grease banks; easy access cone lube; multi-position screen platform (operation, maintenance, travel); incline ladder with handrail; 3-ply conveyor belts with vulcanized splices; cartridge cross belt flashing
- ▶ Rugged, high capacity conveyors; 25 hp (18.6 kW) feed conveyor with deep trough idlers and wrap drive; straight-line (no bend wheel) undercrusher conveyor
- ▶ Low profile 90° cone mounting combined with pivot drive adjustment maximizes drive performance and life
- ▶ 4 axle configuration and 3+1 axle option provide portability in most any location

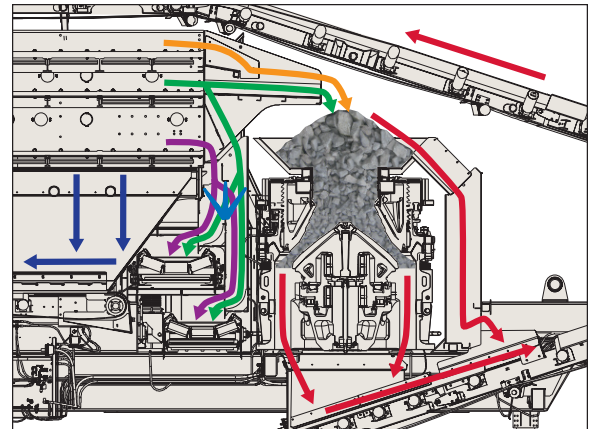

Operating Position



Maintenance Position



Transport Position

www.terexmps.com

Effective Date: July 2013. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex and Cedarapids are registered trademarks of Terex Corporation in the USA and many other countries. © 2013 Terex Corporation.

Terex® Minerals Processing Systems, 909 17th Street NE, Cedar Rapids, IA 52402 USA
Tel +1 319 363 3511 Fax +1 319 399 4871 www.terexmps.com

Form 25542 (7/13)

WORKS FOR YOU.™